





Available with the latest generation diesel engine and with a natural gas engine, in the context of faithful respect for the environment and careful attention to cities and citizens.



The four steering wheels present combined with a reduced turning-radius, allow both models to easily move through any environment, always guaranteeing a flawless cleaning. The washing is performed through a stainless steel bar located on the front side of the cockpit. The operator can adjust the bar from his own work station to all positions, adapting to the different environmental conditions.







Who said that clearing and disinfection should only be reserved to road surface? The Dulevo 6000 Hydro and 6000 Hydro CNG street washers may come equipped

(upon request) with a vertical washing bar, and they are standard endowed with a lance for the cleaning of walls and areas most difficult to reach; thanks to this peculiar solution, the lance can easily wash at distance from the machine.

The front bar, which is made of eleven nozzles for front washing and of two nozzles for side washing, is located underneath the driving cockpit and can be hydraulically steered tilting-, incidence-, and height-wise; this way, the cleaning of areas congested by parked vehicles, market stands and much more becomes easy and effective.








The cabin has been designed so as to guarantee the maximum comfort for the operator and the easiest use. Comfortable, soundproof and with large glass surfaces, the cockpit of these two models of street washers makes work pleasant in any kind of condition. The hydrostatic driving, the power steering and just few controls make the vehicle easy and pleasant to use.





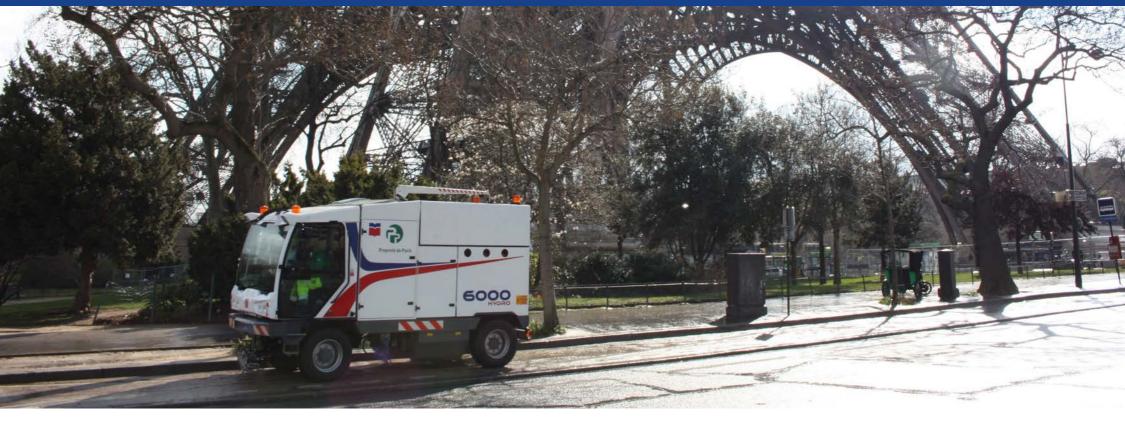




The machine can be configured, according to the customer's needs, with high pressure systems and automatic dosing systems for the sanitizing product.


The street washer is provided with an upper arm to facilitate the use of a washing jet pipe. The arm is very pratical if having to bypass obstacles, such as the parked vehicles, with the washing jet pipe. In the endo part, the arm uses a joint in the terminal part that increases the range of action from its rotation point.







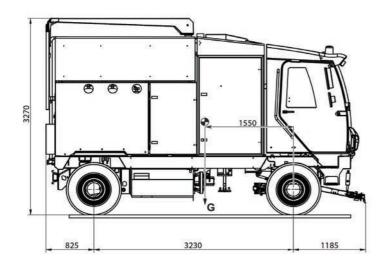

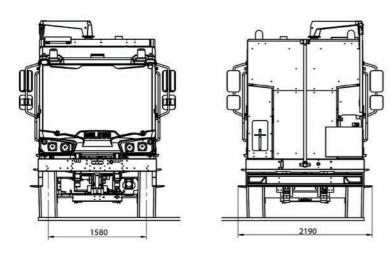

Technical data		6000Hydro	6000Hydro CNG
Washing width:			
- with standard bar	mm	2800	
- with extendable bar (opt)	mm	3200	
Clean water tank capacity	L	5900	4400
Place in the cabin	n°	2	
Working cycle - Indicative cleaning performance	m²/ Tank	30.000	22.000
Maximum speed	Km/h	25 - 40	
Steering diameter (Kerb to kerb)	mm	9360	
Engine Brand		FPT industrial (Iveco)	
Engine Emissions		EURO 6 STEP C	
Alimentation		Diesel	CNG





Dulevo International S.p.A. Via G. Guareschi, 1 43012 Fontanellato (PR) Italia Tel: +39-0521-827711

Fax: +39-0521-827795

www.dulevo.com



